

### Jeep JL Wrangler - JT Gladiator (with OE halogen light)



#### JP-TSR-S JEEP JL WRANGLER RUBICON 2018-UP JEEP JT GLADIATOR RUBICON 2020-UP

Identify your Rubicon, and variants fender flare:


- Top of flare, is even with hood line
- Notch for hood latches



#### JP-TSS-S JEEP JL WRANGLER 2018-UP JEEP JT GLADIATOR 2020-UP

Identify your SE, sport, and variants fender flare:

- Top of flare has a gap to the hood line
- Flares sit flush to the hood latch

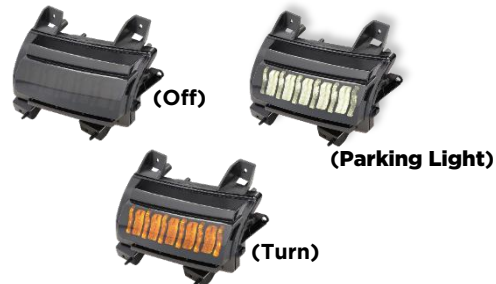

Visit [HEISELED.COM](https://www.heiseled.com) to view the available installation parts and Jeep accessories.

#### KIT FEATURES

- Pair of smoked LED Fender lights
- Mounts to OE location with OE hardware
- OE fender connector
- 1-year limited warranty

\* **OE DRL function is not retained**

#### Tools needed

- T30 Torx
- 10mm socket and ratchet
- Panel removal tool

#### Having difficulties?

Contact our tech support line at:  
[Techsupport@metra-autosound.com](mailto:Techsupport@metra-autosound.com)


Or via phone at:  
**368.257.1187**

#### TECH SUPPORT HOURS (EST)


Monday-Friday: 9:00AM – 7:00PM  
Saturday: 10:00AM – 5:00PM  
Sunday: 10:00AM – 4:00PM

Closed for most US Federal Holidays


1. Remove (3) 10mm bolts from inside fender well.

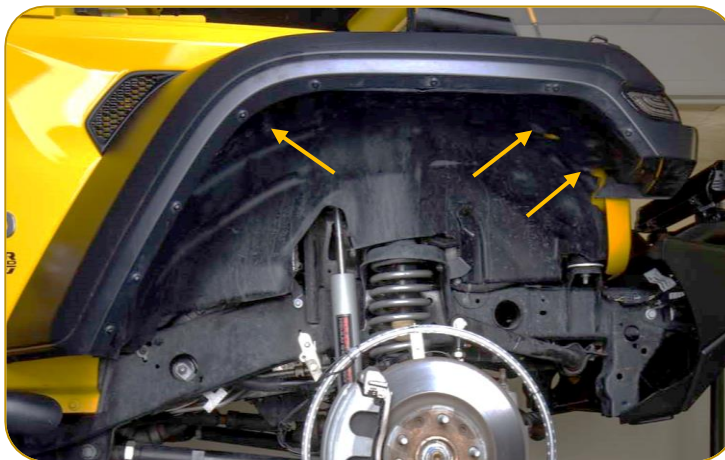

2. Using a panel removal tool, pull out the 5 Christmas tree clips. Pull the inner fender liner back, starting at the front to expose light housing and wiring.

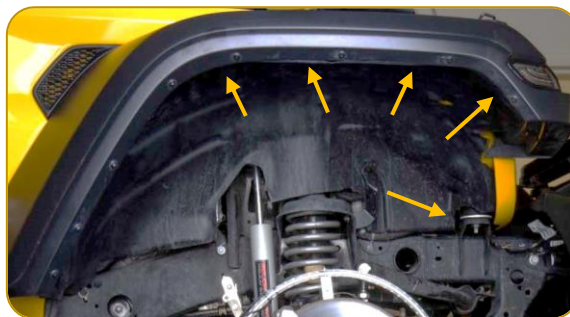


3. a) Push in the rivet center, and pull out rivet.  
b) Remove the 10mm bolt.  
c) Remove the support bracket, to access light.

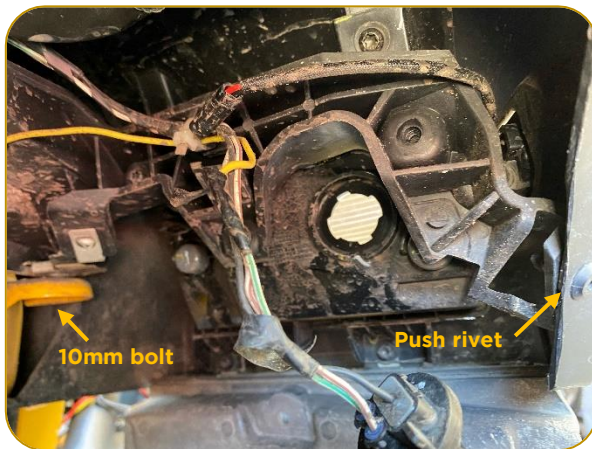


4. Using a T30 bit, remove the (4) screw holding the light housing onto the fender.

Remove the light fixture from fender as an assembly.

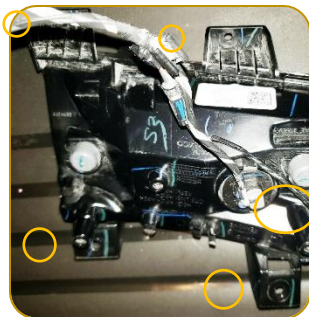

5. Locate the main harness at the rear of the fender.

To disconnect this harness pull out red clip, and press in retaining clip.

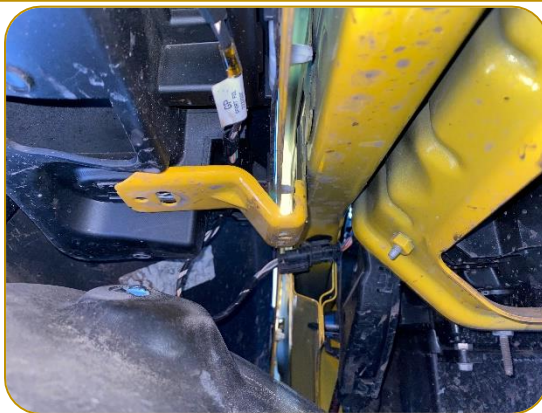

7. Clip new harness into fender, and reinstall light assembly into fender in reverse order of removal.



6. Test Functionality

