



107-CH5 INSTALLATION INSTRUCTIONS Patent Pending




• A) Radio trim panel • B) Radio brackets • C) Extension bracket • D) Vent adapter • E) #8 x 1/2" screw for drivers side (1)



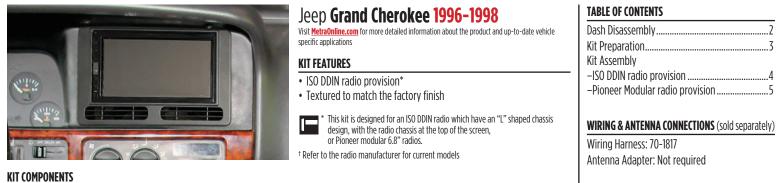





Dash Disassembly	2
Kit Preparation	
Kit Assembly	
-ISO DDIN radio provision	4
–Pioneer Modular radio provision	5

TOOLS REQUIRED

- 3/8" socket set Cutting tool/Dremel
- Panel removal tool Phillips screwdriver

Attention! With the key out of the ignition, disconnect the negative battery terminal before installing this product. Ensure that all installation connections are secure before cycling the ignition to test this product.

Metra. The World's Best Kits.®

MetraOnline.com


© COPYRIGHT 2020 METRA ELECTRONICS CORPORATION


REV. 5/10/24 INST107-CH5

DASH DISASSEMBLY


- **1.** Unsnap the climate control/wiper control trim panel and remove. (Figure A)
- **2.** Unsnap the headlight switch trim panel and remove. (Figure B)
- Remove (10) Phillips screws from the top and bottom of the radio/instrument cluster trim bezel. Pry out on the bottom edge of the bezel and remove. (Figure C)
- **4.** Remove (2) 3/8" hexhead screws securing the factory radio and disconnect the wiring.

Continue to Kit Preparation










(Figure C)




KIT PREPARATION

- **1.** Cut and remove the climate vents from the factory dash panel. (Figure A)
- **2.** Cut the vent area of the factory dash panel. (Figure B)




(Figure A)




(Figure B)

- Secure the extension bracket into the driver's side of the dash opening and secure using factory hardware. (Note the grabbing clip at the back of the bracket) (Figure C)
- **4.** Place the **vent extension** into the factory vent opening. (Figure D)

Continue to Kit Assembly






(Figure D)

KIT ASSEMBLY

Chassis Top DDIN radio provision

- 1. Snap the front mounting tabs off of the **radio brackets**. (Figure A)
- Secure the radio brackets to the radio using screws supplied with the radio. (Figure B)
- **3.** Locate the factory wiring harness and antenna connector in the dash and complete all necessary connections to the radio. Metra recommends using the proper mating adapter from Metra and/or Axxess. Test the radio for proper operation.
- Slide the radio assembly into to the dash, then secure using the factory hardware for the passenger side and (1) #8 Phillips head screw for the driver's side.
- 5. Clip the **radio trim panel** to the factory dash panel.
- **6.** Reassemble the dash in reverse order of disassembly to complete the installation.



(Figure A)

(Figure B)




KIT ASSEMBLY


Pioneer Modular radio provision

Note: For steps 1 and 2, reference the installation manual provided with the radio for which hardware to use. The display screen and radio chassis use two different types of screws.

- 1. Secure the **radio brackets** to the radio chassis using (4) screws supplied with the radio. (Figure A)
- Secure the radio display to the radio brackets using (4) screws supplied with the radio. (Figure B)
- **3.** Connect the radio display to the radio chassis.
- 4. Locate the factory wiring harness and antenna connector in the dash and complete all necessary connections to the radio. Metra recommends using the proper mating adapter from Metra and/or Axxess. Test the radio for proper operation.



(Figure A)



(Figure B)

- Slide the radio assembly into to the dash, then secure using the factory hardware for the passenger side and (1) #8 Phillips head screw for the driver's side.
- 6. Clip the **radio trim panel** to the factory dash panel.
- Reassemble the dash in reverse order of disassembly to complete the installation.







Having difficulties? We're here to help.



Contact our Tech Support line at: **386-257-1187**



Or via email at: techsupport@metra-autosound.com

Tech Support Hours (Eastern Standard Time)

Monday - Friday: 9:00 AM - 7:00 PM Saturday: 10:00 AM - 5:00 PM Sunday: 10:00 AM - 4:00 PM



Metra recommends MECP certified technicians