



## Commercial Heavy Duty Camera With Hood

Visit [iBEAMUSA.com](http://iBEAMUSA.com) for more detailed information about the product and up-to-date vehicle specific applications.

### Product Features

- Heavy duty metal housing
- 18 IR LEDs for night viewing
- Selectable parking lines
- PAL and NTSC selectable

## Part Components

A) Camera    B) 4-pin to RCA adapter and hardware

**A**



**B**



C) Extension (Sold separately)

**C**



### TABLE OF CONTENTS

Camera.....	2
Wiring.....	3
Specifications.....	4

### TOOLS REQUIRED

- Wire stripper
- Tape
- Digital Multi-meter

*Attention! When testing the aftermarket equipment, ensure that all factory equipment is connected before cycling the key to ignition.*

# INSTALLATION

## Camera install

1. There are two loops on the camera. If there is a not a need for parking lines, the loop will need to be cut. (Default lines on) If the video format needs to be changed, the loop will need to be cut. (Default NTSC)
  - Green - parking lines
  - White - PAL or NTSC format
2. Depending on your installation needs, the camera wire does have a grommet inline to use to help with sealing the entry place to the vehicle. iBEAM also suggest using some silicon to better help with water from entering the vehicle.
3. Once installed use the provided stainless screws (Figure B) to secure the hood and base in place with the camera. This can also be done before mounting and tightened once mounted. (Figure C)

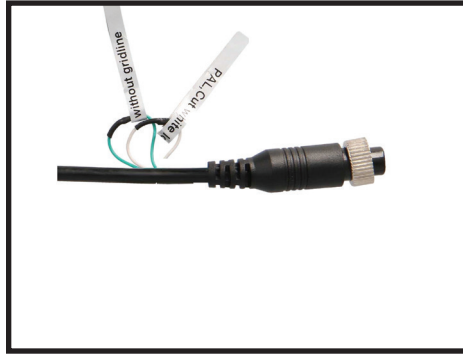


Figure A



Figure B



Figure C

# WIRING

## Wiring

Depending on the monitor that the camera will be connected to, there can be two different ways of wiring.

1. Figure A - Connecting to a 4-pin commercial monitor. Using the iBeam commercial camera extension (sold separately) part # TE-CEX10, TE-CEX20, TE-HEX10 or TE-HEX20 depending on your desired length.
2. Figure B - Connecting to a RCA connection style monitor. Using the supplied RCA to 4-pin adapter, connect the desired length of commercial camera extension listed above.
  - RED wire connect to 12V accessory or reverse trigger depending on your need for the camera.
  - Black wire connect to ground.

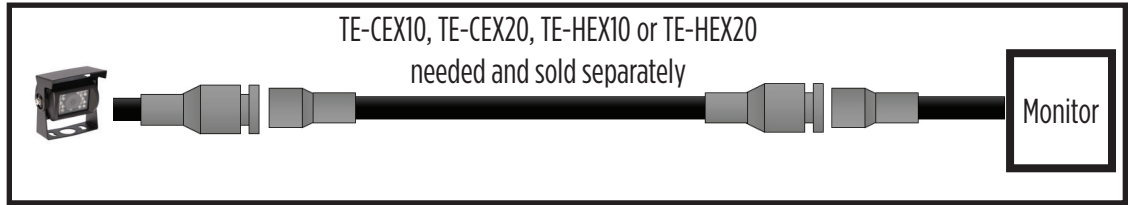


Figure A

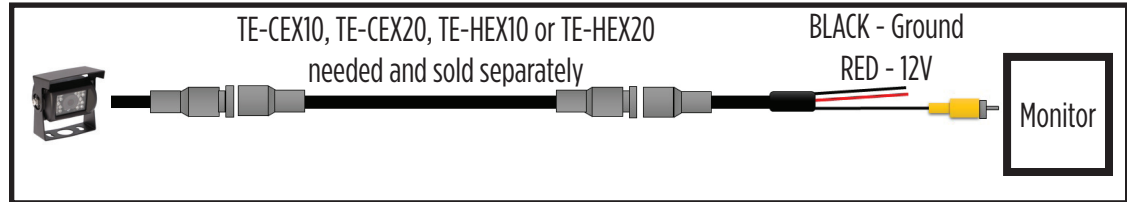


Figure B



Resolution	600 TV lines
Field of view	Diagonal 120°
TV System	NTSC or PAL - white loop
Min. Illumination	0.01 Lux
Working Voltage	12 V
Storage Temp.	-20° ~ 75 °C
Working Temp.	-30° ~ 85 ° C
IP rating	IP68

Having difficulties? We're here to help.



Contact our Tech Support line at:  
**386-257-1187**



Or via email at:  
techsupport@metra-autosound.com

**Tech Support Hours (Eastern Standard Time)**

Monday - Friday: 9:00 AM - 7:00 PM

Saturday: 10:00 AM - 7:00 PM

Sunday: 10:00 AM - 4:00 PM



**KNOWLEDGE IS POWER**

Enhance your installation and fabrication skills by enrolling in the most recognized and respected mobile electronics school in our industry. Log onto [www.installerinstitute.com](http://www.installerinstitute.com) or call 800-354-6782 for more information and take steps toward a better tomorrow.



**Metra Recommends MECP  
certified technicians**