



HE-FDSTL

Spare Tire Light

Fits 2021-Up Ford Bronco

Tools needed: Ratched with 19mm socket, a second person (recommended)

Installation Instructions:


- 1) Using ratchet and 19mm socket, remove (3) lugs holding spare tire.
- 2) With assistance from a helper, remove spare tire and set aside.



4) Locate the harness inside the carrier that goes up to the third brake light. Open harness to expose the two wires.



5) Place the spare tire light onto the carrier lugs, then splice the red wire to the vehicle yellow wire (+12V) and the black wire to the vehicle black/green wire (ground).

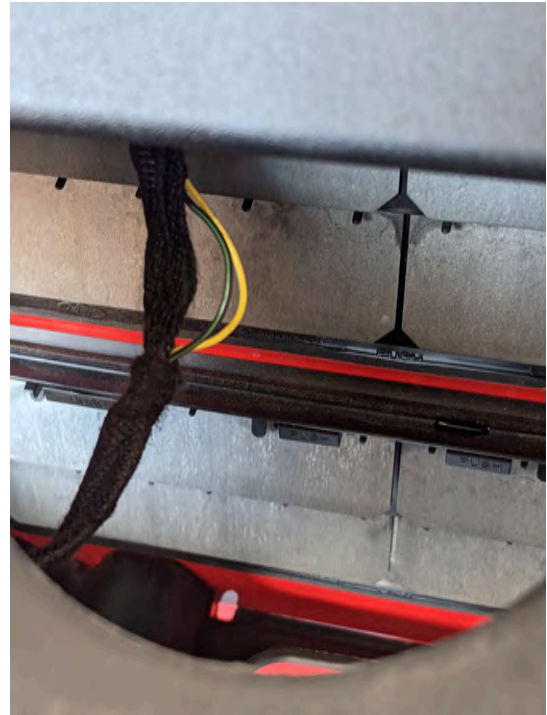

6) Test the brake light. Then remount the factory wheel with assistance from helper.

