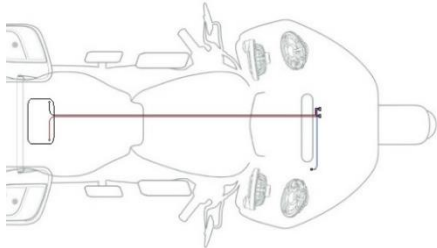

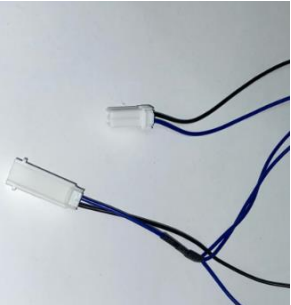

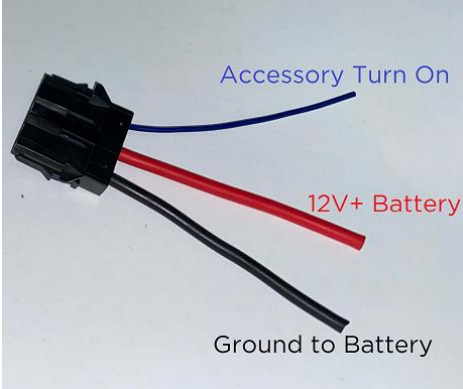




THE INSTALLER'S CHOICE

BC-9703

Amplifier power and accessory turn-on harness

<p>1. Remove the seat, gas tank, front fairing and back bone cover.</p> <p>(This information can be found in a repair guide, or manufactures service manual.)</p>	<p>2. Layout BC-9703 across the motorcycle, taking note of the routing path. We recommend going down the clutch side.</p>  
<p>3. (Optional) From the BC-9703 harness, locate the white connector. On the throttle side of the Motorcycle you will see a black 2-pin connector. Connecting this plug, will provide the amp with Accessory turn on.</p>  	<p>4. There are two (three pin) connectors coming off the BC-9703. These can be used to install dual amplifiers, or connected to single amplifier. Stowing the other connector safely away.</p> 
<p>5. Connect Ring terminals to battery.</p> <ol style="list-style-type: none">Red to Positive battery terminal.Black to Negative battery terminal.Insert fuse into weatherproof holder.	<p>6. Connect The open-ended harness to Amplifier</p> <ol style="list-style-type: none">Red is Battery 12VDC +Black is Battery GroundBlue is Accessory Turn on from the Motorcycle
<p>7. Reinstall the Backbone cover, Gas tank, seat and front fairing to complete installation.</p>	

