


**Replacement H-D LED Running/Brake light, Smoked Lens**

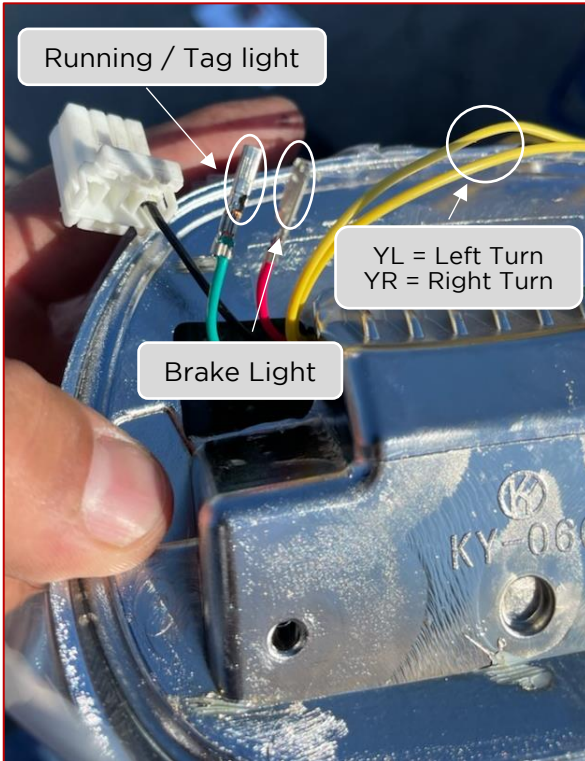

***This installation is on rear fender.***

*NOTE: Most installations can re-use the factory light base.*

1. Remove screws on left and right of the taillight. *Save these for use on new taillight.*
2. Disconnect stock taillight harness from the motorcycle.
3. Using a DMM (Digital Multimeter) identify which wires are Running light, brake light, and ground in the factory connector.



4. Pin harness according to findings with DMM. **DO NOT** click pins into place, test the functions are correct. If not, swap the Green and Red wires in the connector and test again. When correct click pins into place.

*NOTE: Common H-D Pinout: [RED] [Blank] [GREEN] [BLACK]*

5. Complete installation by screwing light into place.