


Replacement H-D LED Running/Brake light, Smoked Lens



This installation is on rear fender.

1. Using #2 Phillips, remove screws on left and right of the taillight. *Save these for use on new taillight.*
2. Disconnect taillight harness from the motorcycle.
3. Using a DMM (Digital Multimeter) identify which wires are Running light, brake light, and ground in the factory connector.
4. Pin harness according to findings with DMM. **DO NOT** click pins into place, test the functions are correct then click pins into place.
5. Complete installation by screwing light into place.

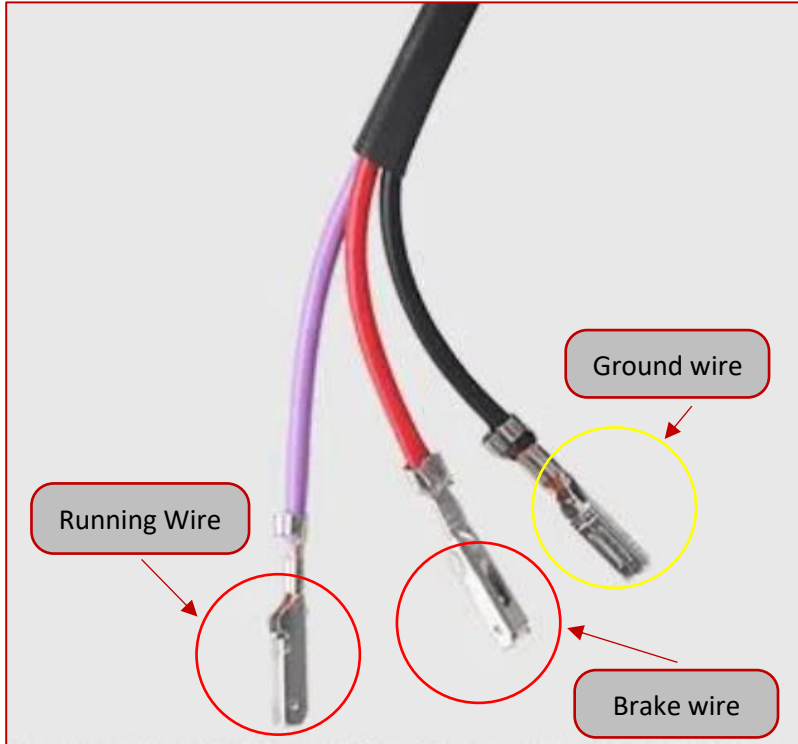