


12MM ROUND ILLUMINATED LATCHING SWITCHES

InstallBay
INSTALLATION HARDWARE

CELEBRATING
75
YEARS
OF INNOVATION

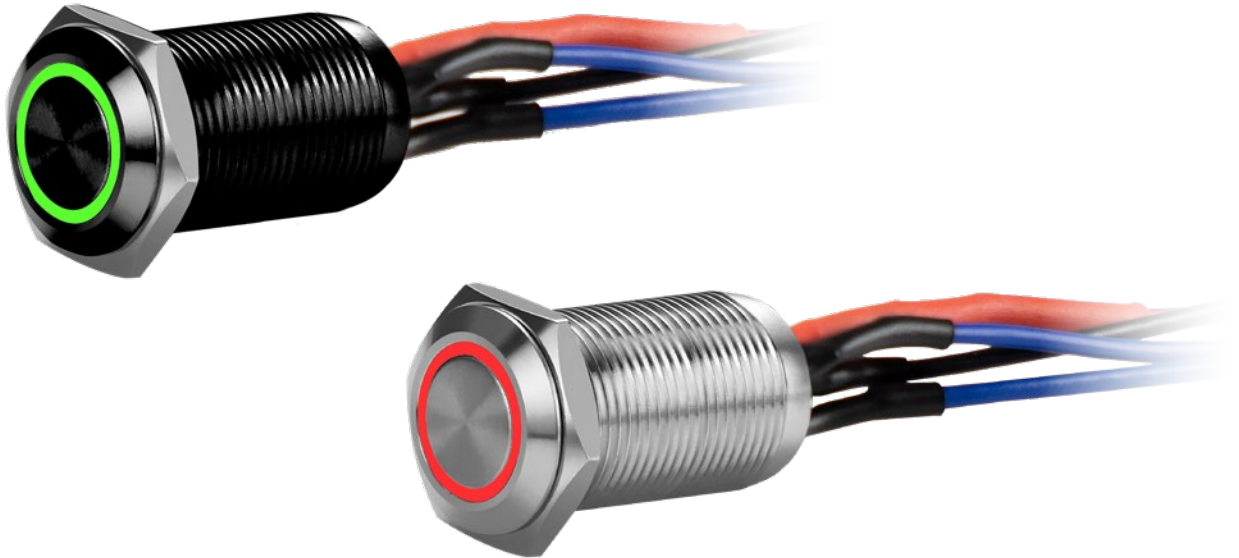


12MM ROUND ILLUMINATED LATCHING SWITCHES

 SALES 386-257-2956

BLACK	SILVER	COLOR
LB12R-2	LS12R-2	RED
LB12B-2	LS12B-2	BLUE
LB12G-2	LS12G-2	GREEN
LB12W-2	LS12W-2	WHITE
LB12Y-2	LS12Y-2	YELLOW

Sold as each

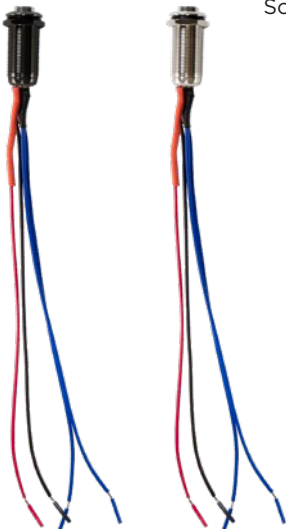

Performance Requirements


- Protection Grade: IP65, IK08
- Contact Resistance: <math><50\text{m}\Omega</math>
- Insulation Resistance: >1000m Ω
- Dielectric Strength: 2000VAC, 1 min.
- Mechanical Life: >500,000 cycles
- Electrical Life: >50,000 cycles

Technical Requirements


- Switch Rating: DC3A/12V
- Action Form: Latching
- Operating Temperature: -4°F - +131°F (-20°C - 55°C)

Lamp Perimeters

- Lamp Type: LED
- Lamp Current: <math><20\text{mA}</math>
- LED Life: 50,000 hours



Installation Size



Switch Size