

PRO SERIES

LED BULB MANUAL



SINGLE



DUAL



HID

Remove factory bulb

Install new bulb


1



**Lock mechanism may be different depending on model*

Apply double sided tape

2

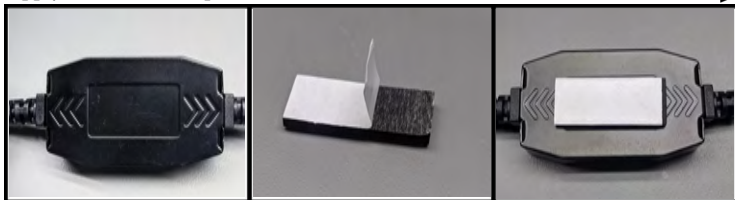

3

Make connection



NOTE: Some vehicles may require a Canbus adapter to stop flashing/pulsating of bulbs or a lamp out messages in the instrument cluster. These can be purchased separately at your local Heise retailer.


PATTERN ADJUSTMENT

(1) Loosen the set screw just enough so that the bulb can be rotated

**some models do not have a set screw*



(2) Set vehicle on a level surface, 10 feet back from a wall or garage door



(3) Turn the bulb and watch the pattern on the wall change.



(4) When the pattern becomes crisp, with a sharp top line and no hot spots in the field stop rotating



(5) Re-tighten the set screw



Visit us online for full installation videos



Keep your original factory bulbs so that you can replace them for use on public roads. Keep the box that the new bulbs came in to store the bulbs and be sure to handle them with care when removing and re-installing.



WARNING: THIS LIGHTING PRODUCT IS SOLD FOR OFF-ROAD USE ONLY. This product should not be used on the road. Keep your original factory bulbs so that you can replace them for use on public roads. Keep the box that the new bulbs came in to store the bulbs and be sure to handle them with care when removing and re-installing.