



INSTALLATION INSTRUCTIONS FOR PART 70-7864DZ

APPLICATIONS

HONDA ACCORD

*2003-07 Honda Accord adapter to adapt
the Metra 99-7864 kit for dual zone
climate control applications*

Instructions

IMPORTANT: If rear window defogger function is desired, professional installation is **STRONGLY RECOMMENDED**. Disconnect the negative battery terminal to prevent an accidental short circuit.

1. Disconnect the negative battery terminal to prevent an accidental short circuit.
2. Disassemble the dash as per the 99-7864 instructions.
3. Connect the 22-way green plug of the dual zone harness to the installation kit and connect the 22-way and 16-way green caps of the dual zone harness to their mates in the vehicle.
 - * If rear window defogger function is not desired, tape off yellow/green wire to prevent an accidental short circuit, then installation of the dual zone harness is complete.

TOOLS REQUIRED:

Small Flat Blade Screwdriver | Socket Wrench



1-800-221-0932



www.metraonline.com



© COPYRIGHT 2004-2009 METRA ELECTRONICS CORPORATION



70-7864DZ



Interior Instructions

- For rear window defogger function to be retained, follow the steps below. Remember that professional installation is **STRONGLY RECOMMENDED**.
1. Follow steps 1-3 to install dual zone harness.
 2. Remove (1) Phillips screw from bottom of panel below steering wheel unclip panel and remove **(FIGURE A)**
 3. Unclip plastic cover panel below the dash and remove **(FIGURE B)**
 4. Using the 8' yellow/green wire provided, connect the bullet connector to the mating bullet connector on the dual zone harness.
 5. Route the yellow/green wire through the grommet on the firewall **(FIGURE C)** with a wire puller, being sure to avoid any moving parts that could damage the wire.

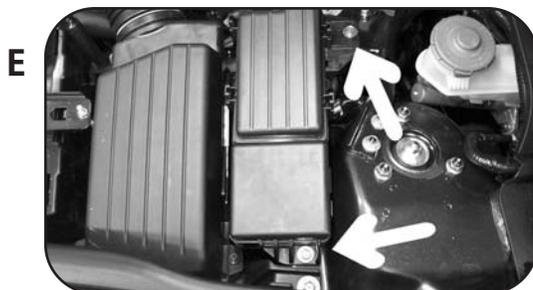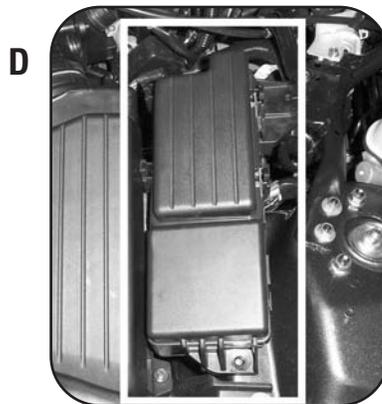

70-7864DZ

1. Route wire from grommet over to the under hood fuse box (**FIGURE D**)
2. Using a 10mm socket, remove the (2) 10mm bolts that mount the fuse box to the car. (**FIGURE E**)
3. Lift up on the fuse box and unclip the plastic cover on the bottom of the fuse box. (**FIGURE F**)
4. Locate the 16-way connector (**FIGURE G**) and unplug it.
5. Looking at the back of the plug where the wires go in, take a small flat blade screwdriver and unclip the terminal lock (**FIGURE H**).
6. Taking the yellow/green wire with the terminal on it, insert it into the 16-way plug at the location pictured (**FIGURE I**); the terminal will only lock in one way.
7. Snap the terminal lock back down and reinsert plug into the back of the fuse box.
8. Reinstall plastic cover and bolt fuse box back down.
9. Be sure to protect the yellow/green wire under the hood with split loom.

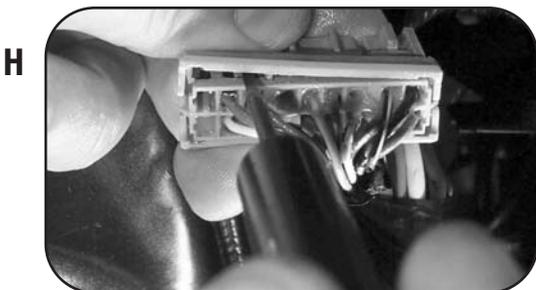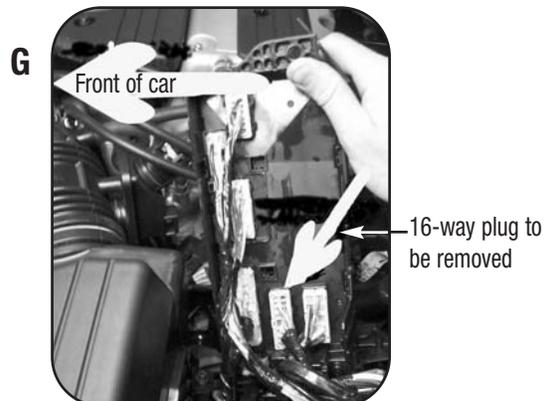

Locking clip on 16-way plug

70-7864DZ



1-800-221-0932



www.metraonline.com

© COPYRIGHT 2004-2009 METRA ELECTRONICS CORPORATION REV. 04-08-09