


Harness allows you to connect your aftermarket amplifier to factory fairing speakers

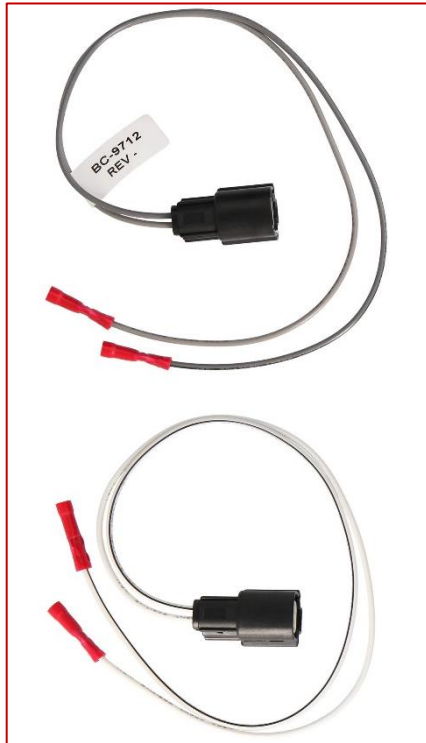

This installation is inside front Fairing.

For instructions on how to remove fairing, please reference the [BC-HDR-K1](#).

1. With fairing removed, disconnect the OEM speaker plug into the speaker pod.
2. Connect the BC-9712 to the speaker pod, and the bullet connectors will mate to the output of your amplifier speaker output.

