



## Jeep Wrangler JL 2018-up\* & Gladiator JT 2020-up\* Soundbar Speaker Kit


Visit [Metraonline.com](http://Metraonline.com) for more detailed information about the product and up-to-date vehicle specific applications.

### Product Features

- Designed to adapt the factory 4" to 6x9" speaker
- Speaker depth 3 5/8"
- Mounting plate/cutting template included
- Hardware included
- Harness included (12")

## Part Components

A) Speaker covers    B) Mounting/Cutting Template    C) Harness and Hardware

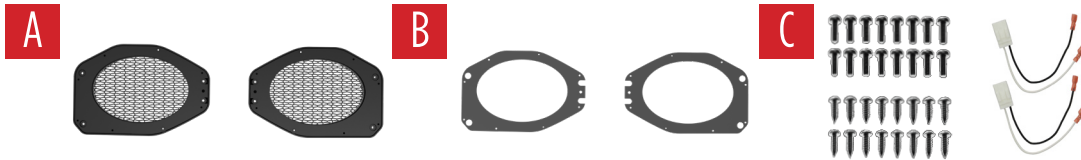

### TABLE OF CONTENTS

Soundbar Removal .....	2
Template cutting.....	3-4
Re-assembly .....	5
Speaker install.....	6
In box components and measurements.....	7-8

### TOOLS REQUIRED

- 3/16 Allen bit
- Phillips bit
- Reciprocating saw or other cutting device

**Attention!** When testing the aftermarket equipment, ensure that all factory equipment is connected before cycling the key to ignition.

# SOUNDBAR REMOVAL

## Removal

1. It is highly recommended that the sound bar be removed for install of this speaker adapter kit.
2. Remove all panels along the top trim of the vehicle to gain access to the soundbar. (**Figure A**)
3. Remove all the screws holding the sound bar to the vehicle. Please be careful and have access to help if needed to not break or damage the vehicle or soundbar. (**Figure B**)
4. Unplug the harness and remove soundbar from the vehicle.

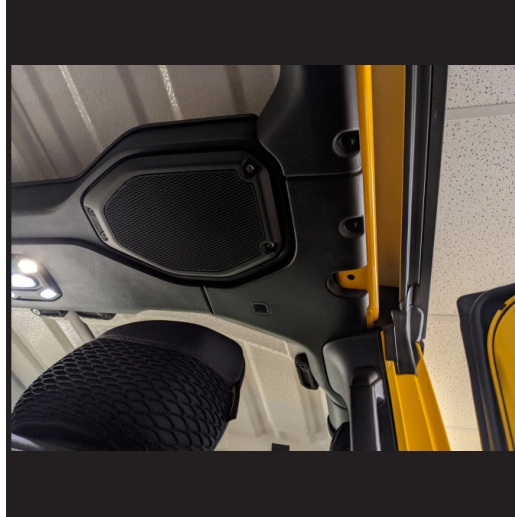


Figure A



Figure B

## TEMPLATE CUTTING

1. Remove the screws holding the grille in place.
2. Remove the OE speakers from the soundbar.
3. Place the template (**Figure A**)
4. Trace the area in (**Figure B**) and remove template, this will be the area that needs to be cut.

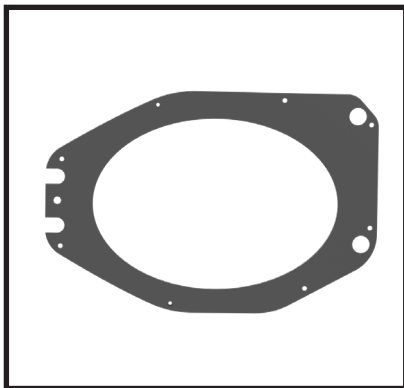


Figure A



Figure B

## TEMPLATE CUTTING (CONT.)

5. Cut the traced area carefully. Be sure not to cut through to the back of the soundbar and not to cut through the OE wiring.

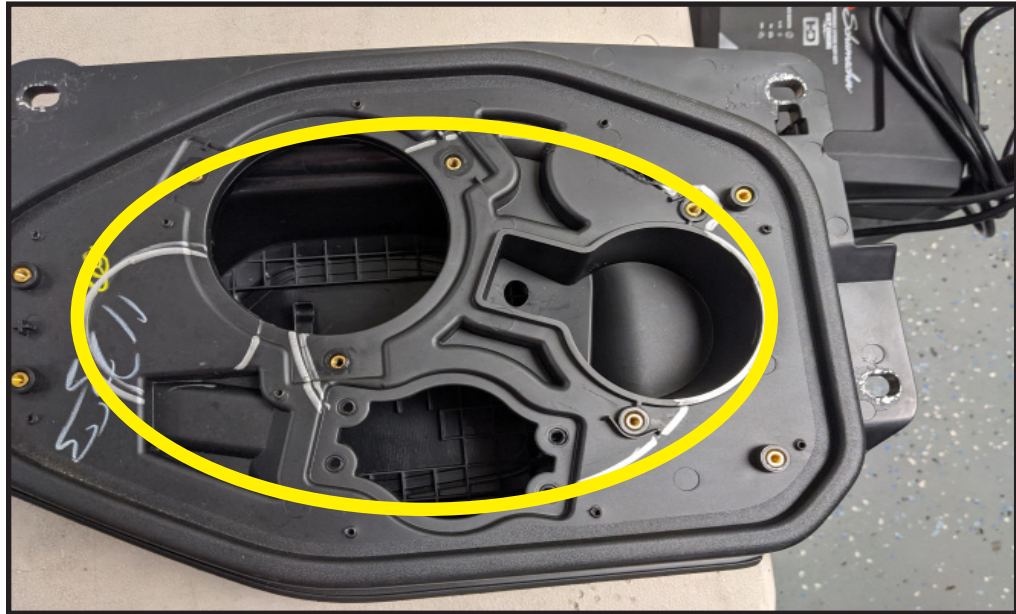


Figure C

# RE-ASSEMBLY

## Assembly

1. Place the metal cutting template using the (8) provided screws, and secure to soundbar. **(Figure A)**
2. Test fit the 6x9 speaker fits properly and the depth is good. Depth is 3 5/8".
3. Attach grille using the provided (4) screws. **(Figure B)**



Figure A



Figure B

# SPEAKER INSTALL

## Install

1. Plug provided speaker harness into OE connector and wire speakers. Mount the speaker using the mounting holes provided. **(Figure A)**
2. Attach 6x9 grille using hardware from this kit. **(Figure B)**
3. Repeat previous steps on opposite side of soundbar.


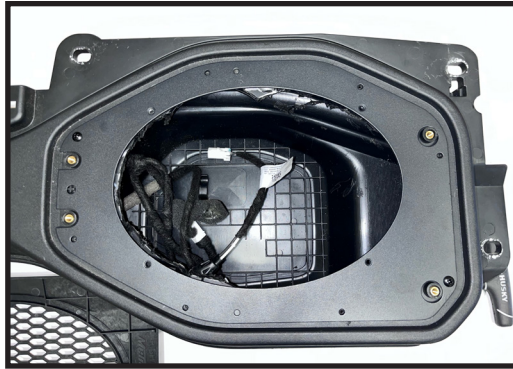


Figure A



Figure B

# IN BOX COMPONENTS

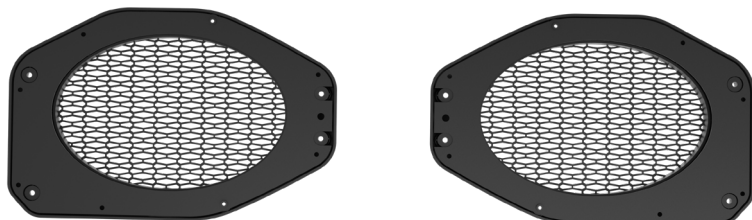


Grille Replacement (2)



Grille replacement  
M4x12 screws (16)



Grille support ST4x12  
screws (16)

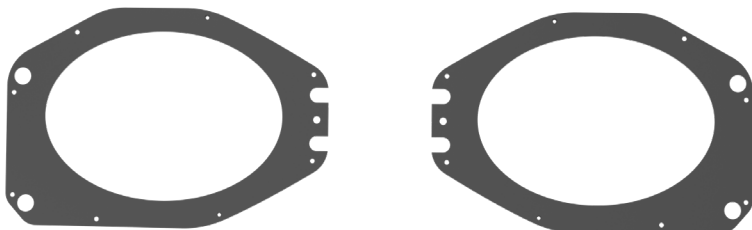

Cutting Template/grille support (2)

Sound deadening padding included, not pictured (2)




Speaker Harness (2)



# JP-1016

INSTALLATION INSTRUCTIONS

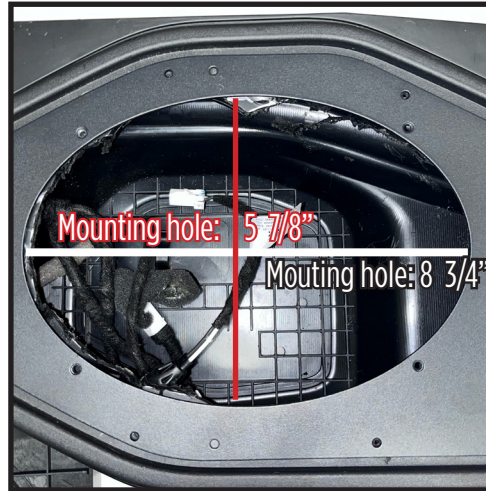

Having difficulties? We're here to help.



Contact our Tech Support line at:  
**386-257-1187**



Or via email at:  
[techsupport@metra-autosound.com](mailto:techsupport@metra-autosound.com)

### Tech Support Hours (Eastern Standard Time)

Monday - Friday: 9:00 AM - 7:00 PM

Saturday: 10:00 AM - 7:00 PM

Sunday: 10:00 AM - 4:00 PM



### **KNOWLEDGE IS POWER**

Enhance your installation and fabrication skills by enrolling in the most recognized and respected mobile electronics school in our industry. Log onto [www.installerinstitute.com](http://www.installerinstitute.com) or call 800-354-6782 for more information and take steps toward a better tomorrow.



**Metra Recommends MECP**  
certified technicians