


AXDSPX-HN3 INSTALLATION INSTRUCTIONS



www.MetraOnline.com





Honda **DSP Interface With Amp Bypass Harness**

2016-2022

Visit AxxessInterfaces.com for more detailed information about the product and up-to-date vehicle specific applications.

INTERFACE FEATURES

- Includes a DSP (Digital Signal Processor)
- 31 Band graphic EQ
- 10 individually assignable outputs
- Independent equalization on each of the 10 outputs
- Independent high pass, low pass, and bandpass filters
- Each channel can be delayed independently up to 10ms
- Clipping detection and limiting circuits
- Designed for amplified models
- Includes an amp bypass harness
- Retains level control of subwoofer through the factory radio
- Settings adjusted via Bluetooth® in a smart device application (tablet or mobile phone), compatible with both Android and Apple devices
- Read, write, and store configurations for future recall
- Password protect feature available in the mobile app
- Micro-B USB updatable

TABLE OF CONTENTS

onnections	2
nstallation	
lobile App	4-5
pecifications /Speaker Assignment QR o	

INTERFACE COMPONENTS

- AXDSPX-HN3 interface
- ID-DSPX-HONSP interface harness
- Amplifier bypass harness (integrated)

TOOLS & INSTALLATION ACCESSORIES REQUIRED

- Crimping tool and connectors, or solder gun, solder, and heat shrink • Tape • Wire cutter
- Zip ties Multimeter


Google Play Store



Apple App Store



CONNECTIONS

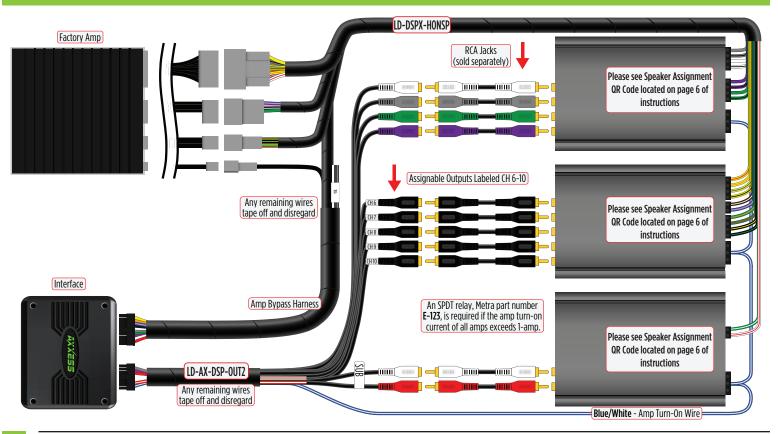

INSTALLATION

- **1.** Locate the factory amp in the passenger side kick panel. Unplug and remove the amp.
- Install the AXDSPX-HN3 harness and make all necessary connections, but leave the amp turn-on wire disconnected.
- Plug the 20-pin and 16-pin connectors from the AXDSPX-HN3 harness into the AXDSPX-HN3 interface.
- **4.** Download and install the AXDSP-XL app from the **Google Play Store** or **Apple App Store**.
- Open the app and follow the instructions on the Bluetooth Connection tab to pair the mobile device to the AXDSPX-HN3. (Figure A)
- 6. Scroll to the Configuration tab then select the vehicle type. Press the Lock Down button to save the configuration. (Figure B)
- 7. Connect the amp turn-on wire from the AXDSPX-HN3 harness.
- 8. Click the Identify button to confirm that the AXDSPX-HN3 is connected properly. If so, a chime will be heard from the front left speaker or gauge cluster. Test all functions of the installation for proper operation.
- Adjust the DSP settings in the app as desired. Refer to the instructions under the Setup Instructions tab, or online at Axxessinterfaces.com for an explanation of each tab in the app.
- ‡ Anytime the interface is locked down the key must be cycled off then back on

Note: The interface provides a 12-volt 1-amp output to turn on aftermarket amp(s). If installing multiple amps, an SPDT automotive relay will be required if the amp turn-on current of all amps combined exceeds 1-amp. Use Metra part number E-123 (sold separately) for best results.



(Figure A)



(Figure B)

QUICK SETUP STEPS THROUGH AXDSP-XL APP


Google Play Store



Apple App Store iOS 12.1 or higher



- 1. Download and install the AXDSP-XL app from the **Google Play Store** or **Apple App Store**.
- **2.** Turn Vehicle Ignition on. Make sure the Remote Turn on lead is disconnected.
- **3.** Open the app: Select **Bluetooth Connections** page.
 - Select **Scan**, all available AXDSP devices within range will be displayed. Select your AXDSP and hit connect. (Figure A)
- **4.** Select the Configuration page.
 - Select **Vehicle Type** Icon
 - Select the Vehicle Make: _____ (Example: **Hyundai**)
 - Select the Vehicle's model: _____ (Example: Genesis)
 - Select With OE Amp
 - Hit **Apply** (Figure B)
- **5.** Make sure radio volume is all the way down.
- **6.** Connect the amp turn-on wire from the **AXDSPX-HK3 harness** to the aftermarket amplifiers.

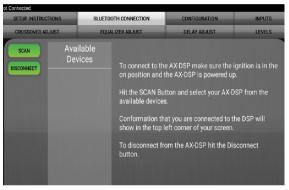

(Figure A)




(Figure B)

QUICK SETUP STEPS THROUGH AXDSP-XL APP (CONT.)

- 7. From the **Configuration** page click the **Identify** button to confirm that the **AXDSPX-HK3** is connected properly. If so, a chime will be heard from the front left speaker.
- **8.** Press the **Lock Down** button to save the configuration. (Do not turn ignition off until this process is completed) (Figure C)
- Select the Bluetooth Configurations page and disconnect the DSPX.
- **10.** Turn ignition off, close all door then lock vehicle using the key fob. The vehicle will need to sit uninterrupted for 10 minutes while the vehicle goes to sleep. (Make sure Key fob is 15 feet away from the vehicle)
- **11.** Unlock Vehicle, turn ignition on and test radio's functions.
- 12. Adjust the DSP settings in the app as desired. Refer to the instructions under the Setup Instructions tab, or online at Axxessinterfaces.com for an explanation of each tab in the app.

Locking Down Data

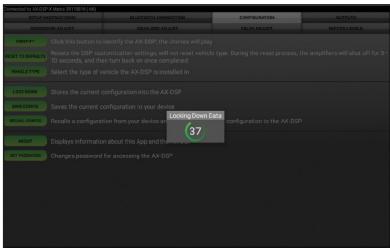

(Figure C)

Last and the most important:
You MUST lock down your
configuration and cycle the key!!!

SPECIFICATIONS

Input Impedance 1M Ohm Input Channels 6

Input Options High Level or Low Level Input Type Differential balanced

Input Voltage 0 - 28-volts (peak-to-peak)

(high level range)

Input Voltage 0 - 4.9-volts (peak-to-peak)

(low level range)

Ouput Channels 10

Output Voltage Up to 5-volts RMS

Output Impedance 50 Ohms

Equalizer Type 31 Band Graphic EQ, +/- 10dB

THD <0.03% Frequency Response 20Hz - 20kHz

Crossover 3-Way LPF, BPF, HPF THP per channel

Crossover Type Linkwitz-Riley 24db slope

Sampling 48kHz

S/N Ratio 105dB @ 5-volts RMS

Operating Voltage 10-16 volts DC

Standby Current Draw 7mA
Operation Current Draw 150mA

Adjustments/Controls Application via Bluetooth Remote Output 12 volts DC (signal sense

or with ignition

Speaker Assignment



Visit AxxessInterfaces.com for more detailed information about the product and up-to-date vehicle specific applications



Having difficulties? We're here to help.



Contact our Tech Support line at: **386-257-1187**



Or via email at: techsupport@metra-autosound.com

Tech Support Hours (Eastern Standard Time)

Monday - Friday: 9:00 AM - 7:00 PM Saturday: 10:00 AM - 5:00 PM

Sunday: 10:00 AM - 4:00 PM



Metra recommends MECP certified technicians